



Your equipment deserves the best!

Introducing
00 Series Ultra Low Profile

- Wheel diameter under 2"
- Load height under 2-1/2"
- Durable design handles dynamic loads up to 150 lbs per caster



innovation 
in
motion

800-353-0868
www.shepherdcasters.com



New

New 1-7/16" wheel diameter low profile size!

00 Series Ultra Low Profile



Features

- Sleek, low profile design
- Up to 150 lb. dynamic load capacity per caster
- Dual ball bearing raceways for smooth and dependable swivel
- Models with polyolefin log wheel are NSF approved
- Industry leading selection and overall value
- Fast deliveries for any order quantity

Applications

- Electronic Equipment
- Refrigeration Equipment
- Business Machines
- Store Fixtures
- Laboratory Equipment

Options


- **Finishes:** Zinc plating standard; optional finishes available. Consult factory.




Wheel Diameter (Inches)	Tread Width (Inches)	Mounting Height (Inches)	Swivel Radius (Inches)	Tread Type	Dynamic Load (Pounds)	Base Model Number (Add fastening code)	Fastening Selection ²
1-7/16"	1-11/16"	Stem: 2-3/16" Plate: 2-7/32"	1-3/4"	Polyolefin Log (Black)	150	C0014___ZN-POL01(KK)	Threaded: 605, 741, 748 Grip Ring: 211, 273 Plate: 120

²To order, include **blue** fastener code in **Base Model Number**. Example: C0014**605**ZN-SFR01(GG)


Threaded Stem

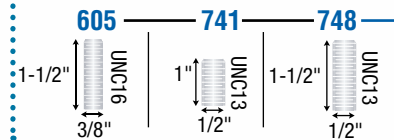

Grip Ring Stem



Top Plate



Shepherd offers a complete line of low profile casters.

